

BBL-1

BARE BOARD LOADER 真空吸板輸送機




CHARACTERISTICS

- * Exception large PCB storage capacity with up 440mm height.
- * 2 levels PCB run out alarm for board replenishment.
- * Parallelism of the conveyor can be kept within 0.5/1000mm.
- * Built-in "by pass" function used as a buffer conveyor.
- * Adoption of PLC allows ease of future expansion or modification.
- * Compatible SMEMA or contact type machine interface.
- * Use of low voltage electrical devices for safety operation.
- * Suitable for Auto or Manual Insertion and SMT lines.
- * Reversible board transfer function provides flexible connection.
- * Conveyor belt can stop automatically when conveyor is idle.

特點

- * 440mm 特大備板高度.
- * 兩段式基板添加警告.
- * 運輸帶之平行度為0.5/1000mm.
- * 內置"通過"功能,可作為緩衝運輸帶.
- * PLC控制,擴展及更改更容易.
- * 適用於 SMEMA 標準及接點式通信.
- * 全部電器元件皆以 DC24V 或以下操作,確保安全.
- * 適用於 AI, MI 及 SMT 流水線.
- * 可選擇送板方向.
- * 等候時運輸帶自動停止.

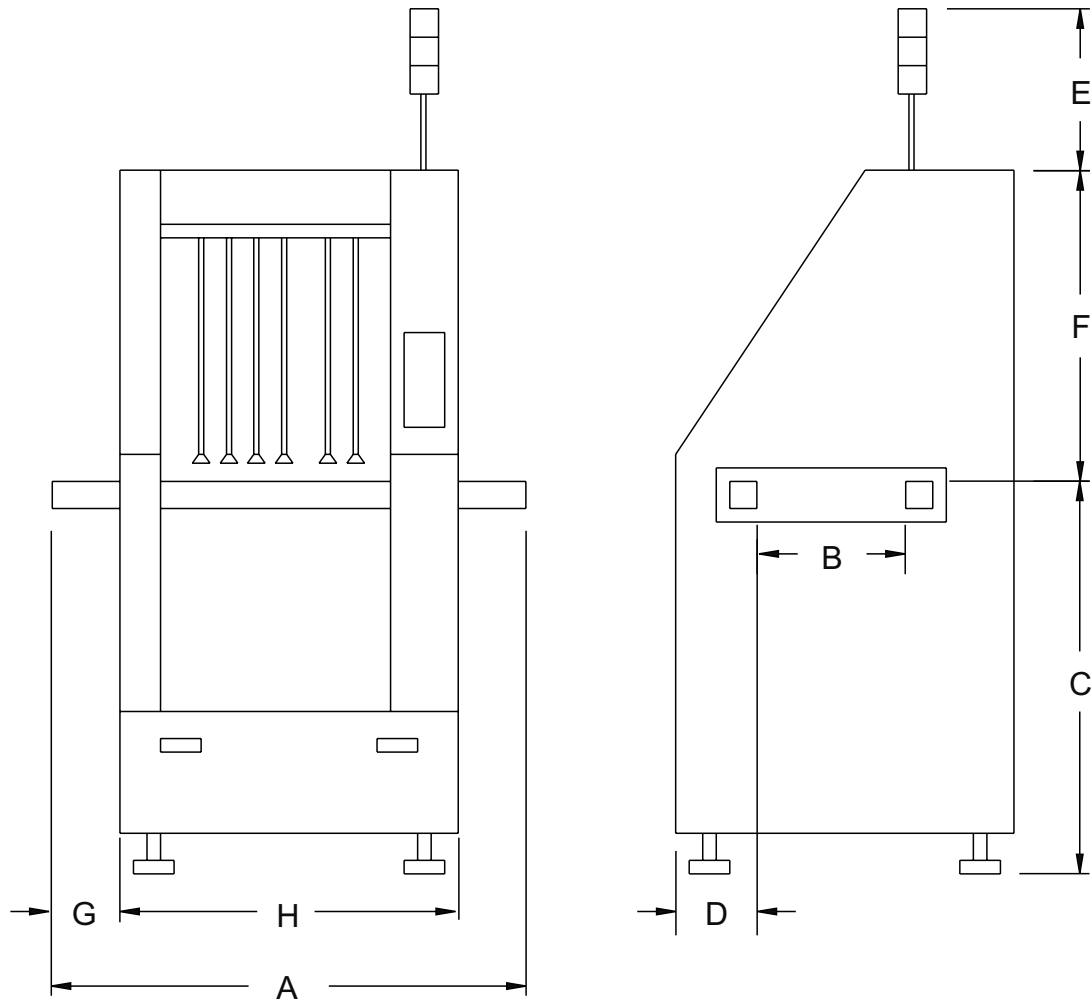

SPECIFICATION		規格	
A	mm	1000	
C	mm	880~935 930~985	
G	mm	155	
Board transfer direction	送板方向		← / →
Adjustable transfer speed	可調速度	mm/sec	120~280 240~600
Edge clearance	承托基板寬度	mm	3.5/4.5
Power supply	電源	vac	110/220
Air pressure	壓縮氣壓	bar	4~6
No. of sensors	電眼數量		2
B Board width	基板寬度	mm	25~355
D	mm	120	
E	mm	550	
F	mm	750	
H	mm	690	



SMartop Technology Limited
創盛科技有限公司

Flat B, 9/F., Wing Yip Ind. Bldg., 21-27 Wing Yip St.,
Kwai Chung, N.T., Hong Kong.

香港辦事處：Tel : (852) 2790 4433/2790 4438

Fax : (852) 2790 5918

Email : sales@smartop.com.hk

中國辦事處：Tel : 86-769-556 1321/86-769-556 5921

Fax : 86-769-556 7183

Email : dg.sales@smartop.com.hk

