


TC-2 TURNING CONVEYOR

迴轉型運輸帶

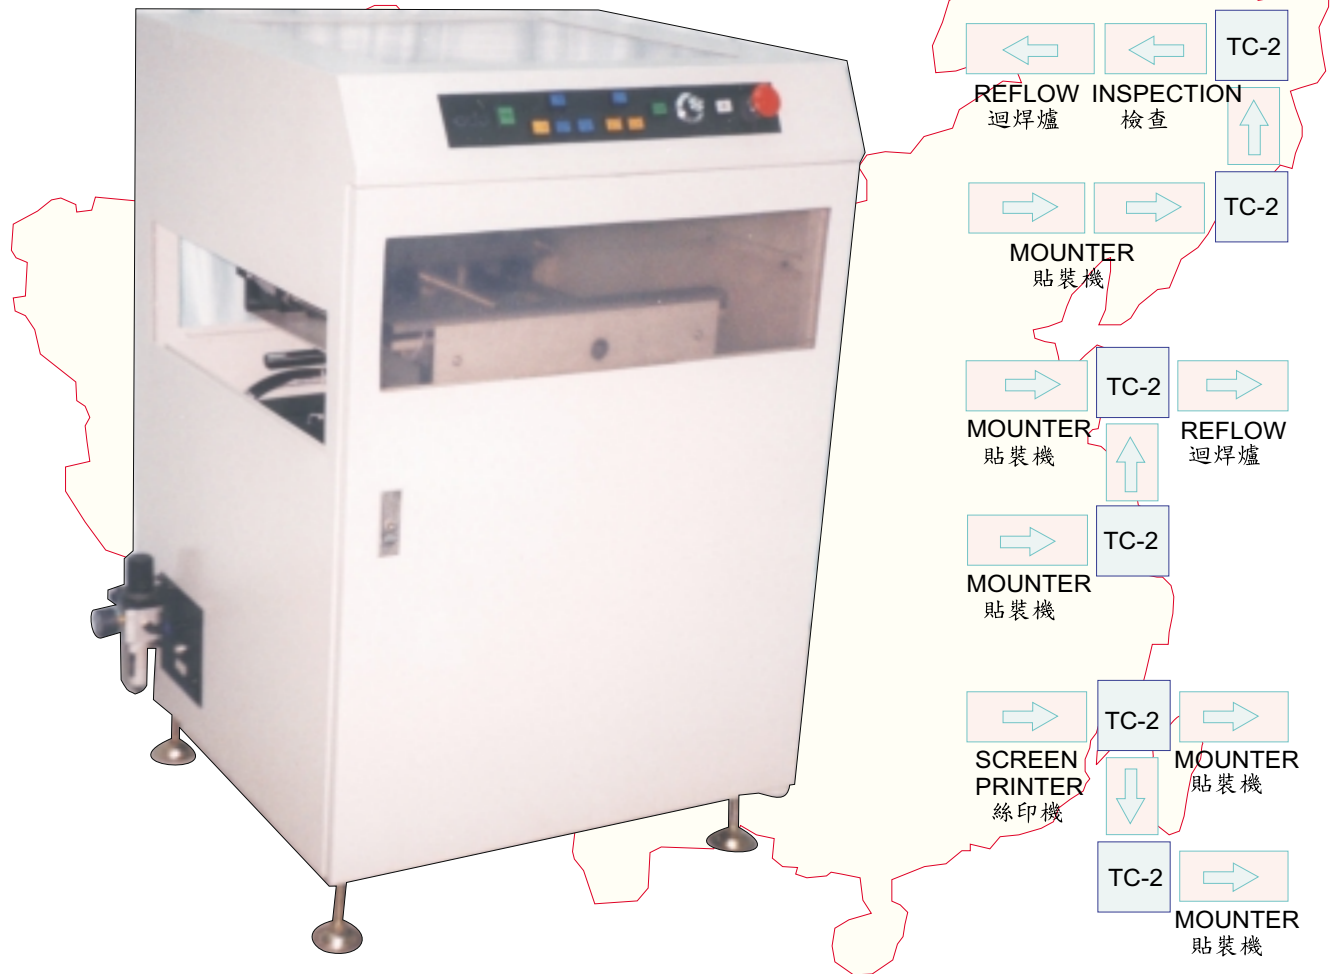


CHARACTERISTICS

- * Totally eighteen configurations are available for distribute the PCB form one line to two or receive the PCB from two lines to one.
- * Parallelism of the conveyor can be kept within 0.5/1000mm.
- * Adoption of PLC allows ease of future expansion or modification.
- * Compatible with SMEMA or contact type machine interface.
- * Use of low voltage electrical devices for safety operation.
- * Suitable for Auto or Manual Insertion and SMT lines.
- * Reversible board transfer function provides flexible connection.
- * Self-diagnostic function supervises board-jamming problem.
- * Conveyor belt can stop automatically when conveyor is idle.




特點

- * 十八款送板結構,可由一條流水線分板至二條,或可由兩條流水線收板至一條.
- * 運輸帶之平行度為 0.5/1000mm.
- * PLC 控制,擴展及更改更容易.
- * 適用於 SMEMA 標準及接點式通信.
- * 全部電器元件皆以 DC 24V 或以下操作,確保安全.
- * 適用於 AI, MI 及 SMT 流水線.
- * 可選擇送板方向.
- * 自我監察送板順暢程式.
- * 等候時運輸帶自動停止.

CONFIGURATIONS 結構

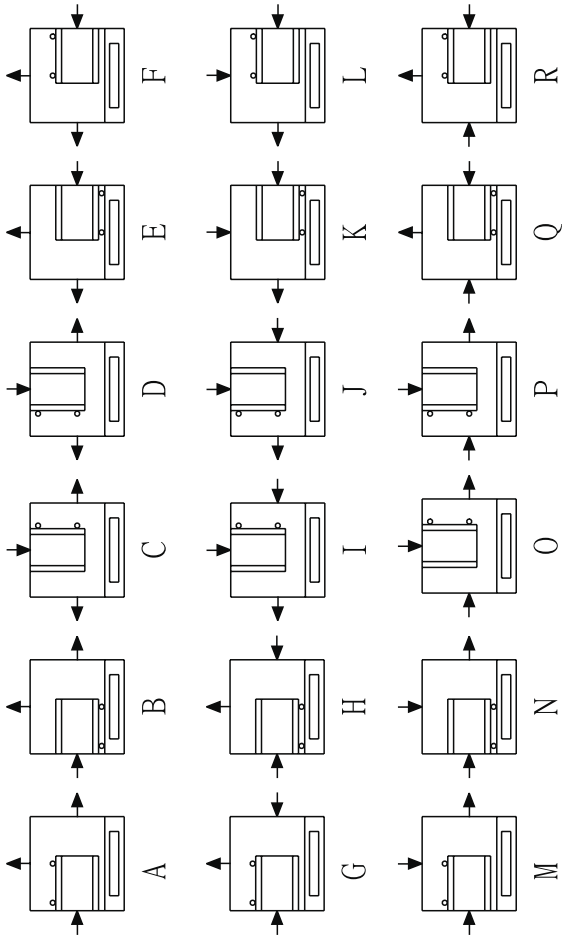

SPECIFICATION		規格
Configuration		A/...../R
Turning direction	迴轉方向	↻
C	mm	735~790 880~935 930~985
Board transfer direction	送板方向	← / →
Adjustable transfer speed	可調速度	mm/sec
		120~280 240~600
Edge clearance	承托基板寬度	mm
Power supply	電源	vac
Air pressure	壓縮氣壓	bar
No. of sensors	電眼數量	2
A	mm	700
B	Board width	mm
		25~355
D	mm	158
E	mm	105
F	mm	695

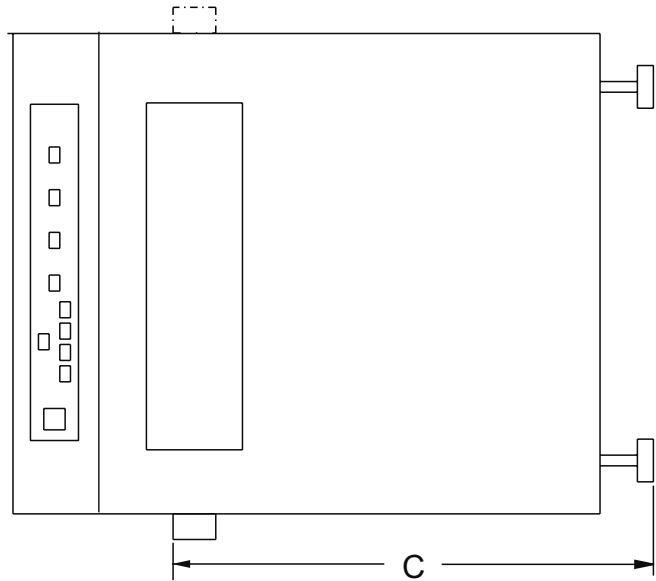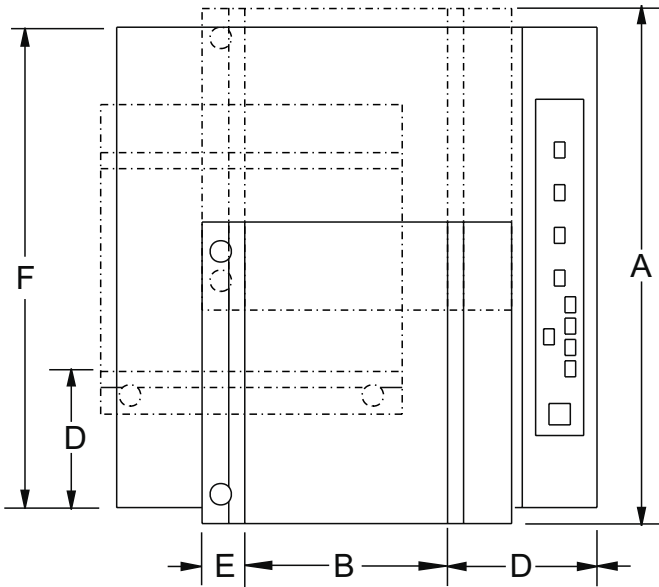

SMartop Technology Limited

創盛科技有限公司

Flat B, 9/F., Wing Yip Ind. Bldg., 21-27 Wing Yip St.,
Kwai Chung, N.T., Hong Kong.

香港辦事處：Tel : (852) 2790 4433/2790 4438

Fax : (852) 2790 5918

Email : sales@smartop.com.hk

中國辦事處：Tel : 86-769-556 1321/86-769-556 5921

Fax : 86-769-556 7183

Email : dg.sales@smartop.com.hk