

BI-1

BOARD INVERTER 反板機




CHARACTERISTICS

- * Smooth rotation.
- * Adoption of PLC allows ease of future expansion or modification.
- * Compatible SMEMA or contact type machine interface.
- * Use of low voltage electrical devices for safety operation.
- * Suitable for Auto or Manual Insertion and SMT lines.
- * Reversible board transfer function provides flexible connection.
- * Conveyor belt can stop automatically when conveyor is idle.

特點

- * 旋轉動作暢順.
- * PLC控制, 擴展及更改更容易.
- * 適用於 SMEMA 標準及接點式通信.
- * 全部電器元件皆以 DC24V 或以下操作, 確保安全.
- * 適用於 AI, MI 及 SMT 流水線.
- * 可選擇送板方向.
- * 等候時運輸帶自動停止.

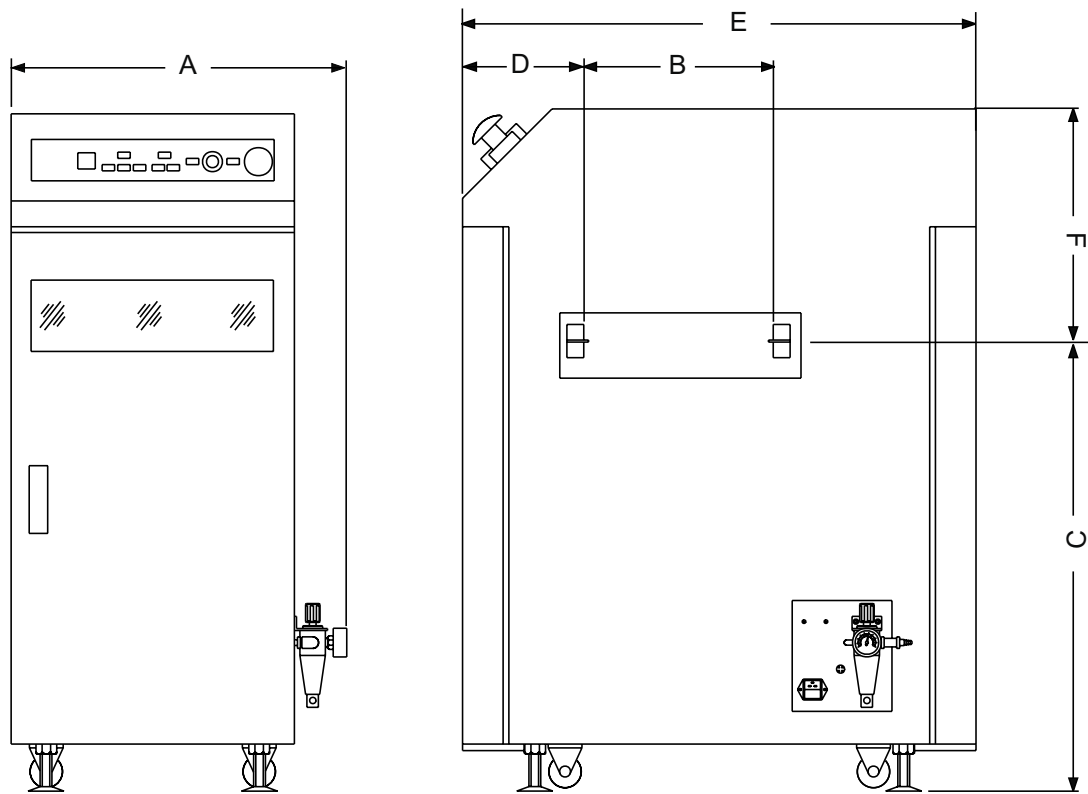

SPECIFICATION	規格	BI - 1	
C	mm	735~790 880~935 930~985	
Board transfer direction	送板方向	← / →	
Edge clearance	承托基板寬度 mm	3.5 / 4.5	
No. of sensors	電眼數量	2	
Power supply	電源 VAC	110 / 220	
Air pressure	Bar	4 ~ 6	
A	mm	600	
B Board width	基板寬度 mm	25 ~ 355	
D	mm	170	
E	mm	910	
F	mm	310	



SMartop Technology Limited
創盛科技有限公司

Flat B, 9/F., Wing Yip Ind. Bldg., 21-27 Wing Yip St.,
Kwai Chung, N.T., Hong Kong.

香港辦事處：Tel : (852) 2790 4433/2790 4438

Fax : (852) 2790 5918

Email : sales@smartop.com.hk

中國辦事處：Tel : 86-769-556 1321/86-769-556 5921

Fax : 86-769-556 7183

Email : dg.sales@smartop.com.hk

