

ML-1 MAGAZINE LOADER

送板機

MU-1 MAGAZINE UNLOADER

收板機




CHARACTERISTICS

- * Separated two conveyors on the lower deck for the magazines.
- * Upper & lower magazine clamps.
- * Sensors are used to detect magazine.
- * Compatible with SMEMA or contact type machine interface.
- * Suitable for Auto or Manual Insertion and SMT lines.
- * Adoption of PLC allows ease of future expansion or modification.

特點

- * 下層分兩段運輸帶傳送貯板架。
- * 上下料架夾緊裝置。
- * 用電眼感應貯板架。
- * 適用於 SMEMA 標準及接點式通信。
- * 適用於 AI, MI 及 SMT 流水線。
- * PLC 控制, 擴展及更改更容易。

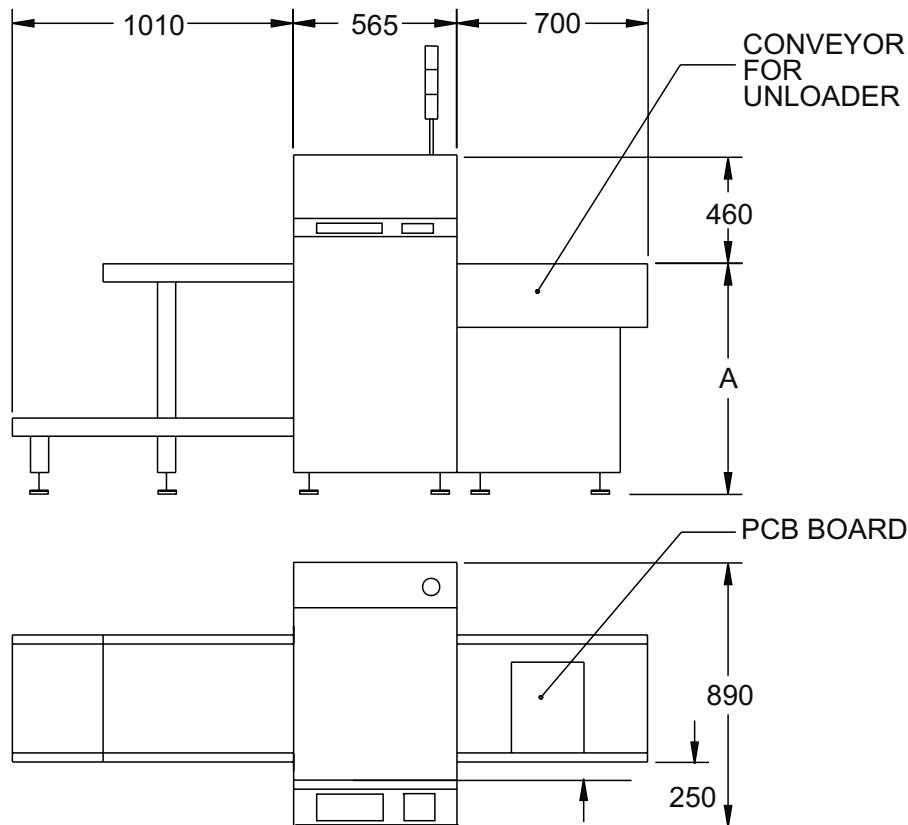

SPECIFICATION		規格	
Model :	Magazine loader Magazine unloader	型號 : 收板機 送板機	ML-1 MU-1
Number of PCB racks :	Moving platform On the upper deck On the lower deck (2 individual conveyors)	貯板架數量 : 升降台 上層 下層 (2 組獨立運輸帶)	1 ≥ 0 ≥ 0
Max. PCB rack size	最大換貯板架尺寸 mm		500(L 長) 400(W 闊) 580(H 高)
Board transfer direction	送板方向		← / →
A	mm		880~935 930~985
Power supply	電源	vac	110/220
Air pressure	壓縮氣壓	bar	4~6
Number of pitch (10 mm / pitch)	間距數量 (10 mm / 間距)		1~4
PCB feeding/receiving time	送 / 收板時間	sec	6
PCB rack change-over time	換貯板架時間	sec	30



SMartop Technology Limited
創盛科技有限公司

Flat B, 9/F., Wing Yip Ind. Bldg., 21-27 Wing Yip St.,
Kwai Chung, N.T., Hong Kong.

香港辦事處 : Tel : (852) 2790 4433/2790 4438

Fax : (852) 2790 5918

Email : sales@smartop.com.hk

中國辦事處 : Tel : 86-769-556 1321/86-769-556 5921

Fax : 86-769-556 7183

Email : salesdg@smartop.com.hk

